

01 -



, web .

:

-
- web
- (Autoprovision)



, «admin».

IP- web .




IP- web http https.

- -
 -
 -
-

:

1. 1, .1.

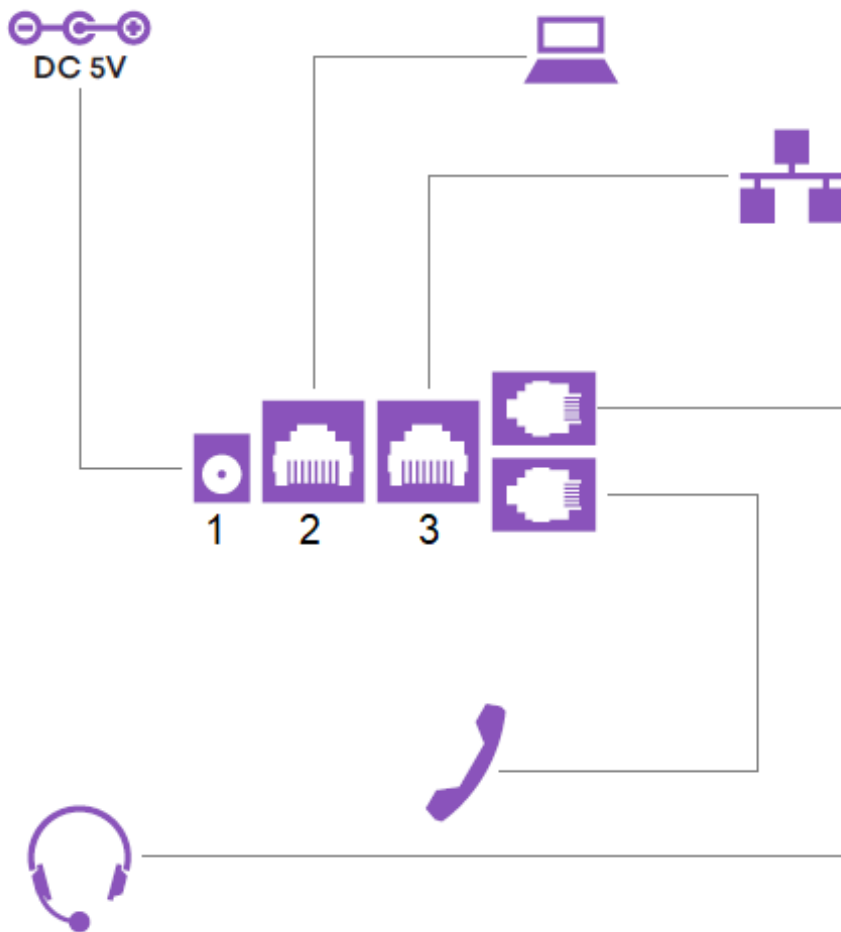

1.

2. IP- .

:

Menu - Settings - Advanced Settings (default password: 123) - Network - Network Settings



«Network Disconnected», , , , / .



:

- **Dynamic Host Configuration Protocol (DHCP)** – IP- DHCP .
- **IP- –** : IP- , , , DNS
- **PPPoE** – . PPPoE ,

3. web

web IP- Enter.

IP- «» , *Menu Status.*

Status

1 Mode: DHCP

2 IP: 192.168.0.7

3 Software: 2.10.0.6586

4 WEB Portal

5 More...

Prev.

Next

Back



web web IE, Edge, Firefox, Chrome.

«admin» ().

User:

admin

Password:

.....

Language:

English

Logon

web , , .

web .

- **Model** -
- **Hardware** -
- **Software** -
- **Uptime** -
- **Last uptime** -
- **MEMinfo** -

Network - Basic - Settings

VP-52CG

Basic

Service Port

Advanced

VPN

Web Filter

Firewall

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Network Status

IP:

192.168.0.7

Subnet mask:

255.255.255.0

Default gateway:

192.168.0.1

MAC:

00:a8:59:f6:7a:3b

Settings

Static IP

Enable Vendor Identifier

Vendor Identifier

DNS Server Configured by

Primary DNS Server

Secondary DNS Server

DHCP

Disable

SNR-VP-52-CG

DHCP

192.168.0.1

109.195.96.1

Apply

PPPoE

Line SIP.

SNR-VP-52-CG-P 2- , SNR-VP-54-CG-P 3- .

Line - SIP - Basic Settings, :

- , , 800, 123.
- IP SIP , , 192.168.0.9.

VP-52CG

SIP

Dial Plan

Basic Settings

RTCP-XR

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Line SIP 1

Basic Settings >>

Line Status

Registered

Activate

☒

Username

800

Authentication Name

800

Display name

Ivan Ivanov

Authentication Password

Realm

Server Name

SIP Server 1

Register Address

192.168.0.9

Register Port

5060

Transportation Protocol

UDP

Registration Expiration

3600

Second

SIP Server 2

Register Address

Register Port

5060

Transportation Protocol

UDP

Registration Expiration

3600

Second

Proxy Server Address

Backup Proxy Server Address

Proxy Server Port

Backup Proxy Server Port

5060

Authentication Name

Authentication Password

Codecs Settings >>

Advanced Settings >>

SIP Global Settings >>

Apply

Line

- **Activate** - ☒
- **Username** - 800
- **Display name** - Ivan Ivanov
- **Authentication Name** - 800
- **Authentication Password** - *****
- **Register Address** - IP- SIP 192.168.0.9



Apply.

Line Status **Registered** ,

VP-52CG

SIP

Dial Plan

Basic Settings

> System

> Network

> Line

> Phone settings

Line

SIP 1 ?

Basic Settings >>

Line Status

Registered

Username

800

System - Information - SIP Accounts

VP-52CG

Information

Account

Configurations

Upgrade

Auto Provision

> System

> Network

> Line

> Phone settings

> Phonebook

> Call logs

> Function Key

Network mode:

DHCP

MAC:

00:a8:59:f6:7a:3b

IP:

192.168.0.7

Subnet mask:

255.255.255.0

Default gateway:

192.168.0.1

VQ Status ?

Start time:

Stop time:

Local user:

Remote user:

Local IP:

Remote IP:

Local port:

Remote port:

Local codec:

Remote codec:

Jitter:

JitterBufferMax:

Packets lost:

Network Packet Loss Rate:

MOS-LQ:

MOS-CQ:

Round Trip Delay:

End System Delay:

Symm One-Way Delay:

Jitter Buffer Rate:

SIP Accounts ?

Line 1	800	Registered
Line 2	N/A	Inactive

Line - SIP - Codecs Settings

VP-52CG

SIP Dial Plan Basic Settings RTPC-XR

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Line SIP 1 ?

Basic Settings >>

Codecs Settings >> ?

Disabled Codecs

Enabled Codecs

G.722

G.711U

G.711A

G.729AB

Advanced Settings >>

SIP Global Settings >>

Apply

- Disabled Codecs -
- Enabled Codecs -

Phone settings - Audio - Audio Settings

VP-52CG

Features Audio MCAST Time/Date Advanced Trusted Certificates Device Cert

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Audio Settings

First Codec G.722 ?

Third Codec G.711U ?

Fifth Codec None ?

Onhook Time 120 millisecond ?

Tone Standard United Stz ?

Speakerphone Volume 5 (1~9) ?

Headset Volume 5 (1~9) ?

Headset Volume Offset 6 (dB) ?

G.729AB Payload Length 20ms ?

G.722 Timestamps 160/20ms ?

Enable VAD ?

EHS Disable ?

Second Codec G.711A ?

Fourth Codec G.729AB ?

Sixth Codec None ?

Handset Volume 5 (1~9) ?

Default Ring Type Type 2 ?

Headset Ring Volume 5 (0~9) ?

Speakerphone Ring Volume 5 (0~9) ?

Headset Mic Offset -6 (dB) ?

G.723.1 Bit Rate 6.3kb/s ?

DTMF Payload Type 101 (96~127) ?

Enable MWI Tone ?

Apply



Apply.

