



01 -

 , web .
:
•
• web
• (Autoprovision)


 , «admin».

IP- web .

 IP- web http https.

- -
 -
 -
-

:
1. 1, .1.

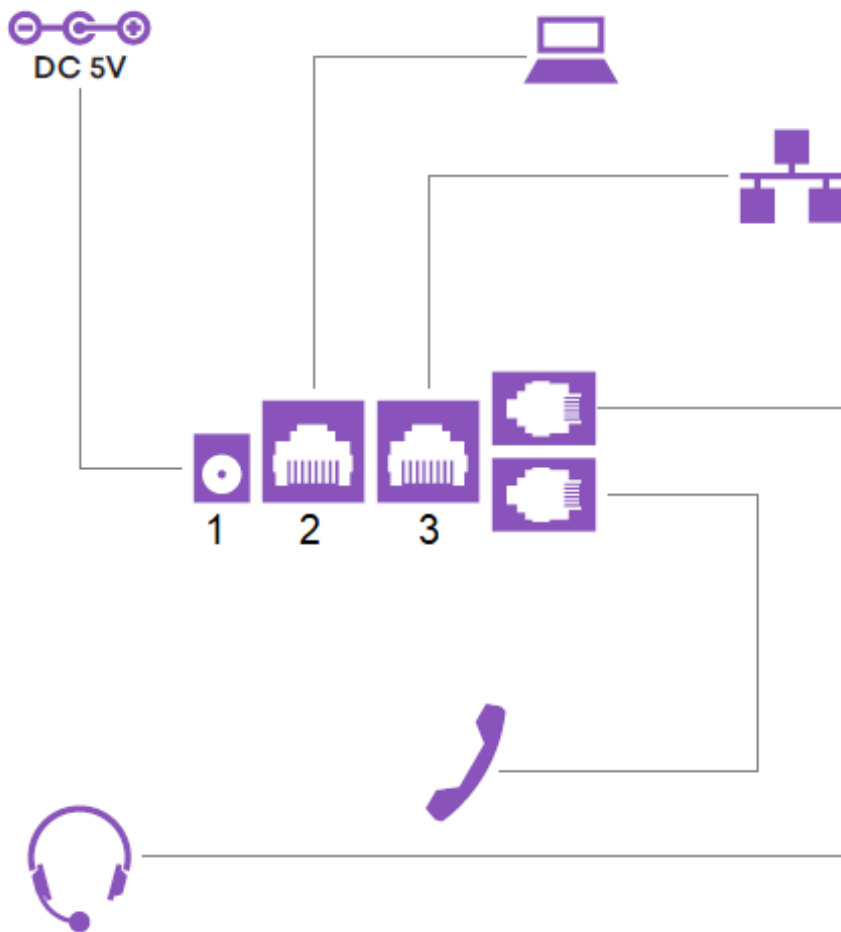

1.

2. IP- .

:

Menu - Settings - Advanced Settings (default password: 123) - Network - Network Settings



!

«Network Disconnected», , . , , / .



:

- **Dynamic Host Configuration Protocol (DHCP)** – IP- DHCP .
- **IP- –** : IP- , , , DNS
- **PPPoE** – . PPPoE ,

3. web

web IP- Enter.

IP- «» , *Menu Status.*

Status

1 Mode: DHCP

2 IP: 192.168.0.7

3 Software: 2.10.0.6586

4 WEB Portal

5 More...

Prev.

Next

Back



web web IE, Edge, Firefox, Chrome.

«admin» ().

User:

admin

Password:

.....

Language:

English

Logon

web , , .

web .

- *Model* -
- *Hardware* -
- *Software* -
- *Uptime* -
- *Last uptime* -
- *MEMinfo* -

Network - Basic - Settings

VP-52CG

Basic

Service Port

Advanced

VPN

Web Filter

Firewall

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Network Status

IP:

192.168.0.7

Subnet mask:

255.255.255.0

Default gateway:

192.168.0.1

MAC:

00:a8:59:f6:7a:3b

Settings

Static IP

Enable Vendor Identifier

Vendor Identifier

DNS Server Configured by

Primary DNS Server

Secondary DNS Server

DHCP

Disable

SNR-VP-52-CG

DHCP

192.168.0.1

109.195.96.1

Apply

PPPoE

Line SIP.

SNR-VP-52-CG-P 2- , **SNR-VP-54-CG-P 3-** .

Line - SIP - Basic Settings, :

- , , 800, 123.
- IP SIP , , 192.168.0.9.

VP-52CG

SIP

Dial Plan

Basic Settings

RTCP-XR

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Line SIP 1

Basic Settings >>

Line StatusRegistered

Activate☒

Username800

Display nameIvan Ivanov

Realm

Authentication Name800

Authentication Password*****

Server Name

SIP Server 1

Register Address192.168.0.9

Register Port5060

Transportation ProtocolUDP

Registration Expiration3600 Second

Proxy Server Address

Proxy Server Port

Authentication Name

Authentication Password

SIP Server 2

Register Address

Register Port5060

Transportation ProtocolUDP

Registration Expiration3600 Second

Backup Proxy Server Address

Backup Proxy Server Port5060

Codecs Settings >>

Advanced Settings >>

SIP Global Settings >>

Apply

Line

- **Activate** -
- **Username** -
- **Display name** -
- **Authentication Name** - ().
- **Authentication Password** -
- **Register Address** - IP- SIP .



Apply.

Line Status **Registered** ,

VP-52CG

SIP

Dial Plan

Basic Settings

System

Network

Line

Phone settings

Line

SIP 1

Basic Settings >>

Line Status

Registered

Username

800

System - Information - SIP Accounts

VP-52CG

Information

Account

Configurations

Upgrade

Auto Provision

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Network mode:

DHCP

MAC:

00:a8:59:f6:7a:3b

IP:

192.168.0.7

Subnet mask:

255.255.255.0

Default gateway:

192.168.0.1

VQ Status

Start time:

Stop time:

Local user:

Remote user:

Local IP:

Remote IP:

Local port:

Remote port:

Local codec:

Remote codec:

Jitter:

JitterBufferMax:

Packets lost:

Network Packet Loss Rate:

MOS-LQ:

MOS-CQ:

Round Trip Delay:

End System Delay:

Symm One-Way Delay:

Jitter Buffer Rate:

SIP Accounts

Line 1

800

Registered

Line 2

N/A

Inactive

Line - SIP - Codecs Settings

VP-52CG

SIP Dial Plan Basic Settings RTPC-XR

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Line SIP 1 ?

Basic Settings >>

Codecs Settings >> ?

Disabled Codecs

Enabled Codecs

G.722

G.711U

G.711A

G.729AB

Advanced Settings >>

SIP Global Settings >>

Apply

- Disabled Codecs -
- Enabled Codecs -

Phone settings - Audio - Audio Settings

VP-52CG

Features Audio MCAST Time/Date Advanced Trusted Certificates Device Cert

System

Network

Line

Phone settings

Phonebook

Call logs

Function Key

Audio Settings

First Codec G.722 ?

Third Codec G.711U ?

Fifth Codec None ?

Onhook Time 120 millisecond ?

Tone Standard United Stz ?

Speakerphone Volume 5 (1~9) ?

Headset Volume 5 (1~9) ?

Headset Volume Offset 6 (dB) ?

G.729AB Payload Length 20ms ?

G.722 Timestamps 160/20ms ?

Enable VAD ?

EHS Disable ?

Second Codec G.711A ?

Fourth Codec G.729AB ?

Sixth Codec None ?

Handset Volume 5 (1~9) ?

Default Ring Type Type 2 ?

Headset Ring Volume 5 (0~9) ?

Speakerphone Ring Volume 5 (0~9) ?

Headset Mic Offset -6 (dB) ?

G.723.1 Bit Rate 6.3kb/s ?

DTMF Payload Type 101 (96~127) ?

Enable MWI Tone ?

Apply



Apply.

