


# 10 - Peer-to-Peer - IP address-

 , SIP-

IP-


- 1. web- IP-  
IP-, Menu - Status OK. IP- : admin/admin
- 2. , IP-

## Phone Settings - Features - Allow IP Call

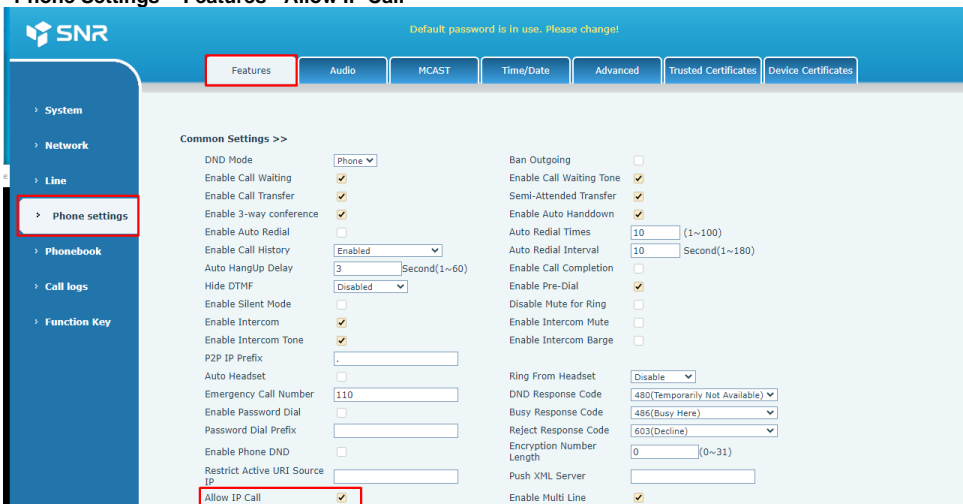

The screenshot shows the 'Features' tab in the SNR Phone Settings. The 'Allow IP Call' checkbox is checked and highlighted with a red box. Other settings include 'DND Mode' set to 'Phone', 'Enable Call Waiting' checked, 'Enable Call Transfer' checked, 'Enable 3-way conference' checked, 'Enable Auto Redial' set to 'Enabled', 'Enable Call History' set to 'Enabled', 'Auto HangUp Delay' set to '3' seconds, 'Hide DTMF' set to 'Disabled', 'Enable Silent Mode' checked, 'Enable Intercom' checked, 'Enable Intercom Tone' checked, 'P2P IP Prefix' set to '.', 'Auto Headset' checked, 'Emergency Call Number' set to '110', 'Enable Password Dial' checked, 'Password Dial Prefix' set to '.', 'Restrict Active URI Source' set to 'IP', 'Ban Outgoing' unchecked, 'Enable Call Waiting Tone' checked, 'Semi-Attended Transfer' checked, 'Enable Auto Handdown' checked, 'Auto Redial Times' set to '10' (1~100), 'Auto Redial Interval' set to '10' seconds (1~180), 'Enable Call Completion' unchecked, 'Enable Pre-Dial' checked, 'Disable Mute for Ring' unchecked, 'Enable Intercom Mute' unchecked, 'Enable Intercom Barge' unchecked, 'Ring From Headset' set to 'Disable', 'DND Response Code' set to '480(Temporarily Not Available)', 'Busy Response Code' set to '486(Busy Here)', 'Reject Response Code' set to '603(Decline)', 'Encryption Number Length' set to '0' (0~31), 'Push XML Server' set to an empty field, and 'Enable Multi Line' checked.

- 3. Line - Basic Settings - SIP Settings - SIP Invite Restrict

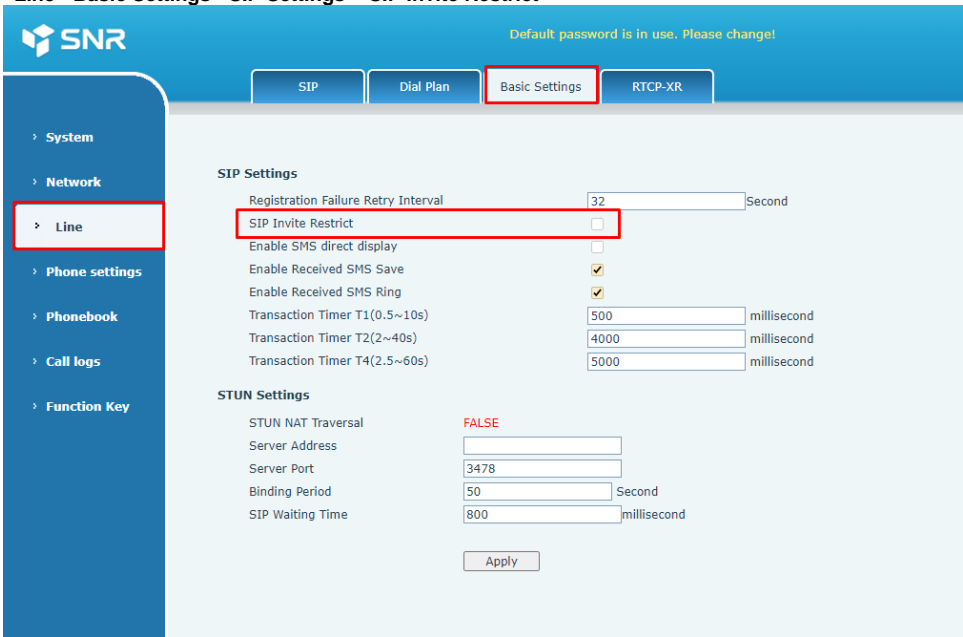

The screenshot shows the 'Basic Settings' tab in the SNR Line - Basic Settings. The 'SIP Invite Restrict' checkbox is checked and highlighted with a red box. Other settings include 'Registration Failure Retry Interval' set to '32' seconds, 'Enable SMS direct display' unchecked, 'Enable Received SMS Save' checked, 'Enable Received SMS Ring' checked, 'Transaction Timer T1(0.5~10s)' set to '500' milliseconds, 'Transaction Timer T2(2~40s)' set to '4000' milliseconds, 'Transaction Timer T4(2.5~60s)' set to '5000' milliseconds, 'STUN NAT Traversal' set to 'FALSE', 'Server Address' set to an empty field, 'Server Port' set to '3478', 'Binding Period' set to '50' seconds, 'SIP Waiting Time' set to '800' milliseconds, and an 'Apply' button at the bottom.

- 4. «Apply».