

MVR Orion A10E/A18E/A28E/A28F/B52X


-
- MVR A10E/A18E/A28E/A28F
- MVR Orion B52X

Multicast VLAN Registration (MVR) IPTV Multicast Ethernet multicast-.

L2-, multicast- VLAN, VLAN. VLAN - multicast-, multicast- VLAN. MVR VLAN multicast-, «» VLAN .

MVR Orion Networks A10E/A18E/A28E/A28F Orion Alpha B52X.

. 28 (VLAN 3) -, 1 (VLAN 12) :

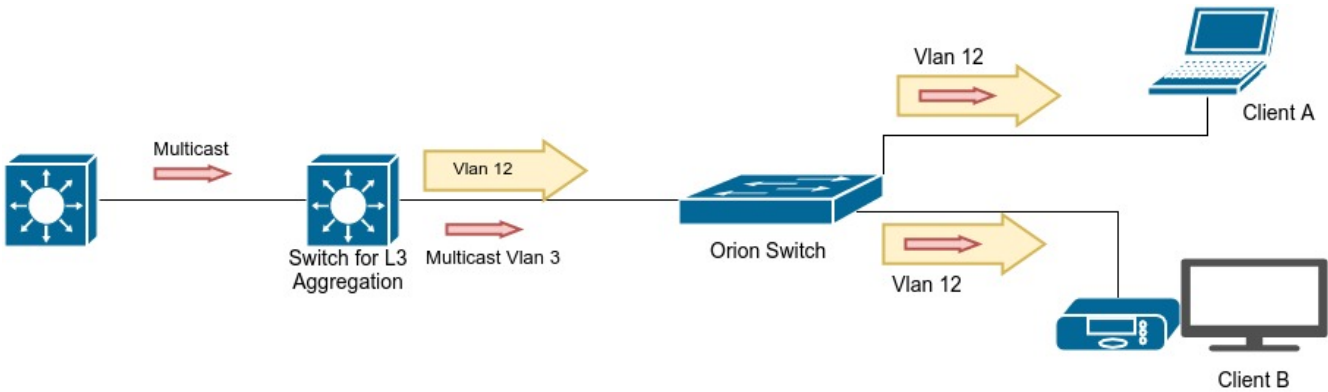

MVR A10E/A18E/A28E/A28F



MVR Orion Networks A10E/A18E/A28E/A28F IGMP snooping.

VLAN 3 12:

```
create vlan 3,12 active
```

MVR:

```
mvr enable
```

VLAN 3 Multicast VLAN :

```
mvr vlan 3
mvr vlan 3 group any
```

:

```
mvr timeout 300
```

, -:

```
interface port 28
```

trunk:

```
switchport mode trunk
```

VLAN 3,12 :

```
switchport trunk allowed vlan 3,12
```

:-

```
mvr type source
```

- . :

```
interface port 1
```

VLAN 12:

```
switchport access vlan 12
```

multicast vlan:

```
switchport access egress-allowed vlan add 3
```

:-

```
mvr type receiver
```

MVR A10E/A18E/A28E/A28F .

MVR Orion B52X

VLAN 3 12:

```
create vlan 3,12 active
```

MVR:

```
igmp mvr
```

VLAN 3 Multicast VLAN :

```
igmp mvr vlan 3 group any
```

MVR 1,2:

```
igmp mvr port-list 1,2,28
```

:

```
mac-address-table multicast filter all
```

, :-

```
interface port 28
switchport mode trunk
switchport trunk allowed vlan 3,12
```

:

```
interface port 1
switchport mode trunk
switchport trunk native vlan 12
switchport trunk untagged vlan 3
```

MVR Orion Alpha B52X .